



POWERTRACKER®

Wallmount Surge Protection Products

EFI's PowerTracker wallmount surge protection devices put protection where it can do the most good to isolate and protect you most sensitive equipment. They feature high quality surge suppression and noise filtration, and can also be conveniently installed at any standard power outlet to eliminate disruptive and damaging electrical disturbances. The PowerTracker line provides you with a choice of solutions to best meet your specific application needs.



APPLICATIONS

The PowerTracker line of wallmount surge protection devices offer superior protection for fax machines, printers and small copiers.

SUPERIOR PERFORMANCE

The PowerTracker wallmount offers performance ranging from 360 to 720 joules. The PowerTracker 200 series yields maximum protection with a warranty for connected equipment of \$25,000. The 100 series and economical 50 series feature warranties of \$10,000 and \$2,500 respectively.

EASY INSTALLATION

The PowerTracker wallmount installs quickly and easily to standard electrical outlets, and it's compact design allows it to be plugged directly into wall outlets and can be concealed behind workstations or copy machines.

FEATURES	ADVANTAGES	BENEFITS
Compact Design	Conveniently installs behind office furniture or copiers	Hides unsightly cord snarls
Sine Wave Tracking	Provides tight clamping above and below the sine wave envelope	Ensures Superior protection from data disrupting transients
Dual Function Diagnostic Lights	Identifies condition of electrical wiring and suppression status	Prevents operating under dangerous conditions
Connected Equipment Warranty	Pays for damage to connected equipment caused by surges	Avoids unexpected costs even under extreme conditions
Bottom Facing Outlets	Copier plug connects to the bottom of the protection device	Allows copier to be placed closer to the wall
Cord Retention Strap	Secures cord to protection device	Prevents unexpected shut-down due to accidental cord disconnection

Wallmount Product Specifications

MODELS AVAILABLE

W50ES, W50ET, W100ES, W100ET, W200ES,
W200ET

PERFORMANCE

Line Voltage	120 Volts
Current Limit	15 Amps
Operating Frequency	50/60 Hz
Max. Line Voltage	130 Volts
Circuit	High Energy, Hybrid Multi-stage
Protection Modes	L-N, L-G, N-G
Response Time	Instantaneous
UL 1449 TVSS Rating	330V

MECHANICAL DESCRIPTION

Dimensions	
Number of Receptacles	2
AC Outlet Type	NEMA 5-15R

DIAGNOSTICS


Protection and Wiring/Ground LEDs

SAFETY APPROVALS

 1449 2nd Edition

WARRANTY

Product	10 years
Downline	See chart below

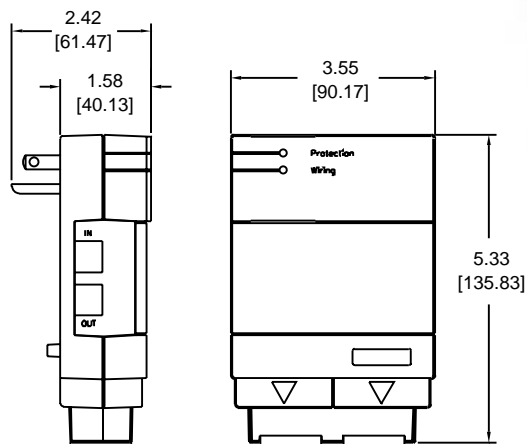

POWERTRACKER SURGE SUPPRESSORS

	50 Series	100 Series	200 Series
AC Protection	W50ES	W100ES	W200ES
AC and Telephone Protection	W50ET	W100ET	W200ET
EMI/RFI Noise Filtration	0 - 25 dB	20 - 40 dB	40 - 60 dB
Joule Rating	360	480	720
Peak Surge Current	27,000	36,000	54,000
Let-through Voltage	< 150	< 140	< 10
Connected Equipment Warranty	10 yr, \$2,500	10 yr, \$10,000	10 yr, \$25,000



EFI Electronics Corporation
1-800-877-1174
efinet.com

© 2002 EFI Electronics Corporation All Rights Reserved
DS033A 6/03